


	T	Character De audience and	Test Results
	Technical Specifications	Standard Requirements	lest kesuits
<u> </u>	Water Absorption UNI EN ISO 10545-03	<0.5%	≤0.5%
<u></u>	Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	≥ 1300 N
<u></u>	Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/mm²	> 35 n/mm²
<u> </u>	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e > 0,55	Resistant
<u>©</u>	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	< 175 mm³
<u>←</u>	Thermal Linear Expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	Compliant to ISO 10545/9
<u> </u>	Moisture Expansion UNI EN ISO 10545-10	As Reported	0.1/ mm/ m
**	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
S	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids and Alkalis: As Reported	Class B
×	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	3
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	PEI IV
35	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	≥0.65
	Shade Variation	As Reported	V2
<u></u>	Thickness	As Reported	20 mm
	Number of Screens	As Reported	16" x 48" - 15 18" x 36" - 14 24" x 24" - 14 24" x 48" - 7 36" x 36" - 7 48" x 48" - 5







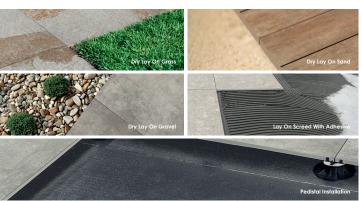













CEPPO DI GRÈ

Ceppo Di Grè brings the beauty of composite flooring to the great outdoors. With a wide variety of stone fragments shown throughout, this terrazo-look collection prioritizes being bold over all else. With its seemingly endless variety of patterning, this line makes a fun and exciting impact on outdoor spaces.

Available in three colors: white, grey, and anthracite and four sizes: 48" x 48", 24" x 48", 36" x 36", and 24" x 24", this collection is bursting with design options. Ceppo di Grè is an opportunity to bring fun solutions to outdoor flooring.





OUTDOOR GRIP/SANDED FINISH 2CM (3/4") PAVERS

WHITE







48" x 48" GREY







ANTRACITE





